


SPECIFICATIONS

Size	Metric	British
Max. Working Height A	32.00m	105ft
Max. Platform Height B	30.00m	98ft 5in
Overall Length C	6.41m	21ft
Overall Width D	1.40m	4ft 7in
Overall Height(Rails Up) E	4.16m	13ft 8in
Overall Height(Rails Down) F	3.17m	10ft 5in
Platform Size(Length×Width)	5.85m×1.20m	19ft 2in×3ft 11in
Platform Extension Size G	1.90m	6ft 3in
Ground Clearance(Stowed/Raised)	0.19m/0.02m	8in/1in
Wheelbase H	4.87m	16ft
Turning Radius(Inside/Outside)	2.60m/3.50m	8ft 6in/11ft 6in
Tyres	28×12-22	28×12-22

Performance		
S.W.L	750kg	1653lb
S.W.L On Extension	750kg	1653lb
Max. Occupants (Indoor/Outdoor)	2/2	2/2
Gradeability	30%	30%
Travel Speed(Stowed)	1.5km/h	0.93mph
Travel Speed(Raised)	0.1km/h	0.06mph
Max. Working Slope	1°(0°)	1°(0°)
Up/Down Speed	160/105sec	160/105sec

Weight		
Overall Weight	22440kg	49472lb

Power		
Hydraulic Tank	220L	58gal
Lithium Battery	80V/520Ah	80V/520Ah
Charger	80V/80A	80V/80A
Driving Motor	4×53VAC/2kW	4×53VAC/2kW
Lifting Motor	53VAC/28kW	53VAC/28kW

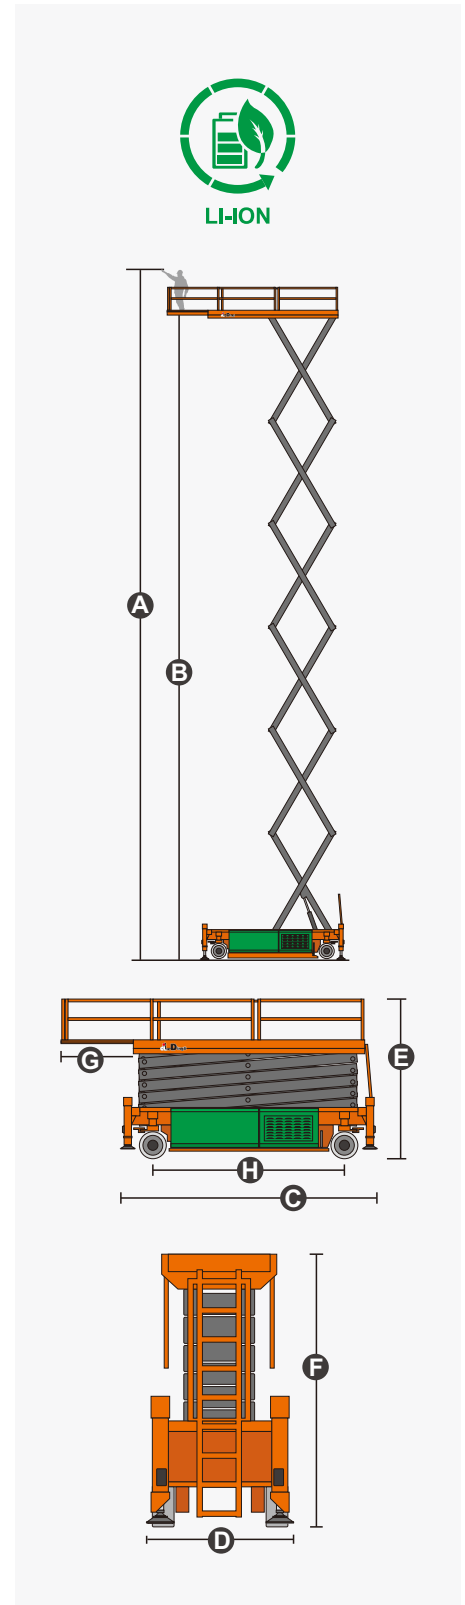


CE EN 280

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Four-Wheel Drive
- Four-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height

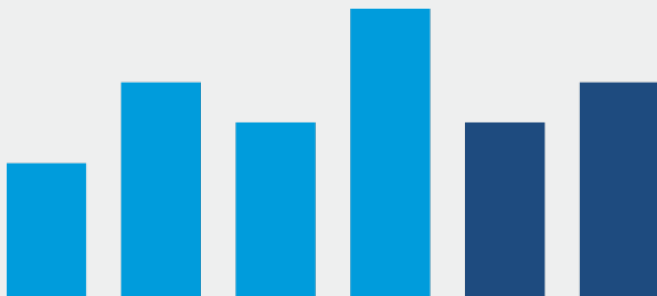

Due to continuous technology updates, technical parameters are subject to change without notice. This picture book is for reference only, the actual product shall prevail. The copyright is owned by zhejiang dingli, any content may not be copied for any purpose without written permission.

2025-03

