

rentit ES SERIES - LIGHTWEIGHT

ES1330L/ES1530L ELECTRIC SCISSOR LIFTS - INDOOR AND OUTDOOR RATED



Performance

| | | |
|---|----------------------------|------------------------|
| Platform Height–Elevated (Indoor/Outdoor) | | |
| ES1330L | 13 ft / 13 ft | 3.8 m / 3.8 m |
| ES1530L | 15 ft / 10 ft | 4.5 m / 3 m |
| Platform Capacity (Indoor/Outdoor) | | |
| ES1330L | 500 lb / 500 lb | 227 kg / 227 kg |
| ES1530L | 500 lb / 500 lb | 227 kg / 227 kg |
| Capacity on Platform Extension | 250 lb | 115 kg |
| Number of Occupants (Indoor/Outdoor) | | |
| ES1330L | 2 / 1 | |
| ES1530L | 1 / 1 | |
| Lift/Lower Time | 25/15 seconds | |
| Maximum Drive Height | Fully Elevated | |
| Weight* | | |
| ES1330L | 1,984 lb | 900 kg |
| ES1530L | 1,940 lb | 880 kg |
| Ground Bearing Pressure | | |
| ES1330L | 119 psi | 8.3 kg/cm ² |
| ES1530L | 116 psi | 81 kg/cm ² |
| Drive Speed–Elevated | 0.5 mph | 0.8 km/h |
| Drive Speed–Lowered | 2.4 mph | 3.8 km/h |
| Gradeability | 25% | |
| Tilt Rating | | |
| Fore and Aft | 3.0 degrees | |
| Side to Side | | |
| ES1330L - Indoor/Outdoor | 1.75 degrees / 1.5 degrees | |
| ES1530L - Indoor/Outdoor | 2.5 degrees / 1.5 degrees | |
| Turning Radius (Inside) | Zero | |
| Turning Radius (Outside) | 55 in | 1.4 m |

* Certain options or country standards will increase weight.



**NOW
OUTDOOR
RATED**

Standard Specifications

Power Source

| | |
|-----------|--------------------|
| Batteries | 2 x 12V 105 amp-hr |
| Charger | 27 Amp |
| Drive | 24V Electric DC |

Hydraulic Reservoir

| | | |
|------------|-------------------------|-----|
| • Capacity | 1.3 gal | 5 L |
| • Pump | Fixed Displacement Gear | |

Tires

| | | |
|--------------------------------|-----------|-------------|
| • Tire Size/Type (Non-Marking) | 10 x 3 in | 255 x 75 mm |
|--------------------------------|-----------|-------------|

Brakes

- Electric/Friction

Standard Features

- Proportional Controls
- Battery Condition Indicator
- All Motion Alarm
- DeltaQ - 27 amp Multi-Function Universal Charger
- Horn
- Hourmeter
- Tilt Alarm and Light
- AC Receptacle in Platform
- Active Pothole Protection System
- Lifting and Tie Down Points
- Fork Lift Pockets
- Lanyard Attach Points
- Steel Swing-Out Doors
- Visual Variable Tilt Indicator
- Manual Descent Cable
- Diamond Tread Steel Deck
- Greaseless Kingpin Joints
- Analyzer Port for Diagnostics
- Dynamic Braking
- Movable, Removable Platform Control
- Nickel Plated Pins
- Lubrication Free Scissor Arm Bushings
- Scissor Maintenance Prop
- 22 in. (55 cm) Foot-Actuated Deck Extension
- Removable Ladder
- Self Closing Gate
- Load Sensing System

Accessories & Options

- Anti-Vandalism Package
- Coiled Platform Control Box Cable
- Flashing Amber Beacon - LED
- Dual Flashing Amber Beacons - LED
- JLG™ Mobile Control
- MDI (Ground)
- CleanGuard™





rentit ES SERIES - LIGHTWEIGHT

ES1330L/ES1530L ELECTRIC SCISSOR LIFTS - INDOOR AND OUTDOOR RATED



Dimensions

All dimensions are approximate.

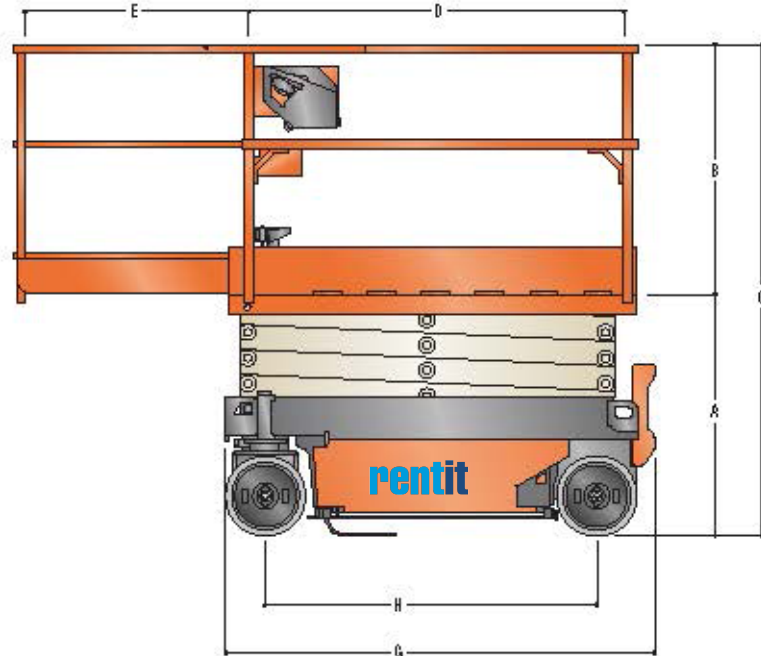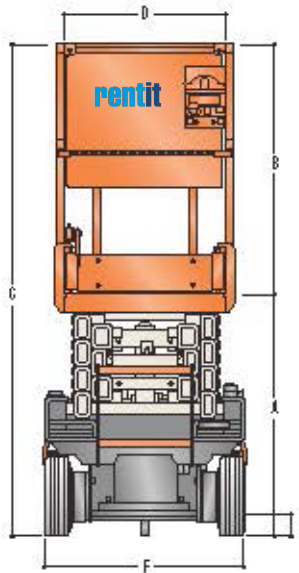

| | | | |
|----------------------------|-----------------|-------------|--|
| A. Platform Height—Lowered | | | |
| ES1330L | 28.0 in. | 0.7 m | |
| ES1530L | 31.1 in. | 0.8 m | |
| B. Platform Railing Height | 43.3 in. | 1.1 m | |
| C. Overall Height | | | |
| ES1330L | 71.7 in. | 1.8 m | |
| ES1530L | 74.8 in. | 1.9 m | |
| D. Platform Size | 24.4 x 49.2 in. | 0.6 x 1.3 m | |

| | | |
|-----------------------|----------|-------|
| E. Platform Extension | 21.6 in. | 55 cm |
| F. Overall Width | 30.0 in. | 76 cm |
| G. Overall Length | 56.2 in. | 1.4 m |
| H. Wheelbase | 42.3 in. | 1.1 m |
| I. Ground Clearance | 2.4 in. | 6 cm |



The JLG "1 & 5" Warranty

We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.

Part No.: 3131508
R0420_A92.20
Printed in USA



JLG Industries, Inc.
1 JLG Drive
McConnellsburg, PA 17233-9533
Telephone 717-485-5161
Toll-free in US 877-JLG-LIFT
Fax 717-485-6417
www.jlg.com

An Oshkosh Corporation Company