

DIMENSIONS	SL26RTE
Max. working height	10.0m
Max. platform height (A)	8.0m
Platform size (stowed)	1.72m x 3.66m
Platform size (extended) (E)	1.72m x 4.6m
Extension deck length	0.91m
Overall width (D)	2.13m
Overall length (C)	3.79m
Stowed height (B)	2.6m
Min. height (guardrails folded)	1.7m
Chassis ground clearance	305mm
Axle ground clearance	195mm



PERFORMANCE	
Platform capacity (SWL)	680kg
Max. wind speed	12.5m/s
Max. drive height	8.0m
Max. drive speed (stowed)	5.4 km/h
Max. drive speed (elevated)	0.8km/h
Raise/lower time	21/32 seconds
Gradeability	50%
Max. levelling, front to rear	9°
Max. levelling, side to side	13°
Inside turning radius	3.9m
Outside turning radius	5.64m
Tyres	26 x 12.00 - 12 foam filled
Controls	digital proportional joystick
Drive system	4 wheel drive with hydraulic motors and flow dividers

POWER	
Power source	Li-ion batteries with integrated BMS
Operating temperature	(-)25°C to (+)60°C
Charger	high frequency smart on-board 50A battery charger

MOTOR	
Motor	AC electric motor

WEIGHT	
Weight	3,500kg

LEVELING CAPABILITIES

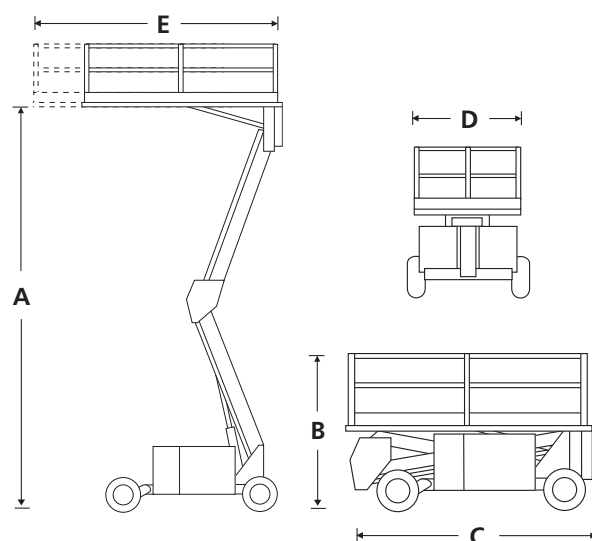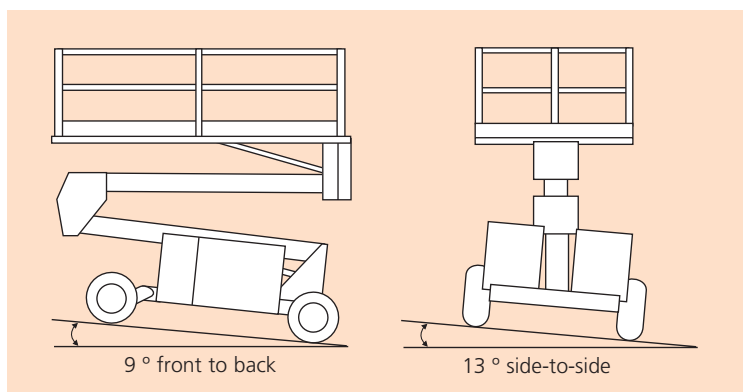

- Two lithium-ion battery systems 11.5kWh
- Automatic powered platform levelling
- Powerful 4 wheel drive
- Oscillating front axle
- High grip non-marking all terrain tyres

