

ELECTRIC TELESCOPIC BOOM LIFTS

TB18EJ PLUS(TB590EJ PLUS)/TB20EJ PLUS(TB660EJ PLUS)/TB22EJ PLUS(TB740EJ PLUS)

Compliant with GB/CE/ANSI/EAC standards

PRODUCT HIGHLIGHTS

Green

- Comfortable working environment without noise pollution, meet indoor or emissions-critical site requirements

Precision Performance

- Three full-scale joysticks for gradual proportional control, Operate with smooth starting and stopping and precision approach to your worksite target
- The Sinoboom IoT system and intelligent 7-inch screen can efficiently control the use and behavior of the equipment

Economical

- Battery quality assurance, low failure rate and reduced maintenance costs compared with diesel power, which reduces overall operating cost

Oscillating-axle Function

- The oscillating-axle function is active at all heights, allowing work to be performed on inclines and uneven ground



Standard Features

Active oscillating axle	7-in display screen	4WD x 2WS
Proportional control with 3 joysticks	Automotive-grade sleeves for all pipes	4-wheel brake
Hydraulic platform leveling	160° Platform rotation	Weighing system
Tilt protection system	Max tilt rating to 5°	Emergency stop system
Flashing beacon	Horn & buzzer	Emergency lowering system
Footswitch	Manual storage box	Fault diagnosis system
Foam-filled non-marking tires	2.44m(8') platform with swinging gate	Secondary guarding device
Telematics-ready connector	AC power to the platform	

Options & Accessories

Lithium battery	Solid tires	1.45m (4'9") platform
1.83m(6') work platform	Half mesh (for platform with swinging gate)	Platform work light
Range Extender* (for TB20EJ Plus & TB22EJ Plus)	Overhead anti-collision device	Glazier kit(for platform with swinging gate)
*Works only with Lithium Battery		

SINOBOOM™

PARTNERS IN ACCESS™

INFO@SINOBOOM.EU | WWW.SINOBOOM.EU



SINOBOOM B.V., NIKKELSTRAAT 26, 2984 AM RIDDERKERK, THE NETHERLANDS, +31 180 225 666

ELECTRIC TELESCOPIC BOOM LIFTS

TB18EJ PLUS(TB590EJ PLUS)/TB20EJ PLUS(TB660EJ PLUS)/TB22EJ PLUS(TB740EJ PLUS)

Compliant with GB/CE/ANSI/EAC standards

Model	TB18EJ PLUS(TB590EJ PLUS)	TB20EJ PLUS(TB660EJ PLUS)	TB22EJ PLUS(TB740EJ PLUS)
Dimensions			
Max Platform Height	18.4 m (60'4")	20 m (65'7")	22.5 m (73'10")
Max Working Height	20.4 m (66'11")	22 m (72'2")	24.5 m (80'5")
Max Horizontal Reach (Restricted/Restricted/Unrestricted)	11.7 m/13.2 m/13.9m (38'5"/43'4"/45'7")	13.85 m/15.4 m/16.7m (45'5"/50'6"/54'9")	12.7 m / 14.3 m / 15.2 m (41'8"/46'11"/49'10")
A Stowed Length	9.67 m (31'8")	9.99 m (32'9")	10.68 m (35'0")
B Stowed Width	2.42 m (7'11")	2.49 m (8'2")	2.49 m (8'2")
C Stowed Height	2.56 m (8'5")	2.79 m (9'2")	2.81m (9'3")
Stowed Length (Transport)	8.71 m (28'7")	8.12 m (26'8")	8.81 m (28'11")
Stowed Width (Transport)	2.42 m (7'11")	2.49 m (8'2")	2.49 m (8' 2")
Stowed Height (Transport)	2.93 m (9'7")	2.77 m (9' 1")	2.93 m (9'7")
D Wheelbase	2.49 m (8'2")	2.49 m (8' 2")	2.49 m (8'2")
Ground Clearance	0.34 m (1'1")	0.39 m (1' 3")	0.39 m (1'3")
Platform Size (L×W×H)	2.44 m×0.91 m×1.1 m(8'×3'×3' 7")	2.44 m×0.91 m×1.1 m(8'×3'×3' 7")	2.44 m×0.91 m×1.1 m (8'×3'×3'7")
Performance			
Max Platform Capacity (Restricted/Restricted/Unrestricted)	454 kg/300 kg/250 kg (1,000 lbs/661 lbs/551 lbs)	454 kg/300 kg/250 kg (1,000 lbs/661 lbs/551 lbs)	454 kg/300 kg/250 kg (1,000 lbs/661 lbs/551 lbs)
Max Platform Occupants (Restricted/Restricted/Unrestricted)	3 Persons/2 Persons/2 Persons	3 Persons/2 Persons/2 Persons	3 Persons/2 Persons/2 Persons
Drive Speed (Stowed / Raised)	0 ~ 4.8 km/h (0 ~ 3 mph) 0 ~ 1.1 km/h(0 ~ 0.68 mph)		
Gradeability	35%	35%	35%
Turntable Rotation	360° /Continuous	360° /Continuous	360° /Continuous
Platform Rotation	160°	160°	160°
Tilt Rating	5°	5°	5°
Turning Radius (Inside/Outside)	2.4 m/4.86 m(7'10"/15'11")	2.4 m/5.55 m(7'10"/18'3")	2.4 m/5.55 m(7'10"/18'3")
Turntable Tail-Swing	1.15 m(3' 9")	1.45 m (4'9")	1.45 m (4'9")
Max Allowable Side Force	400 N(90 lbf)	400 N (90lbf)	400 N (90 lbf)
Max Allowable Wind Speed	12.5 m/s(28 mph)	12.5 m/s (28mph)	12.5 m/s (28 mph)
Tire Spec/Type	33×12D610 (foam-filled) 33×12-20 (solid)	355/55D625 (foam-filled) 36×14-20 (solid)	355/55D625 (foam-filled) 36×14-20 (solid)
Power			
Drive × Steer	4WDx2WS	4WDx2WS	4WDx2WS
Batteries	48 V, 480 Ah (lead acid battery) 51.2 V, 500 Ah (lithium battery)	48 V, 480 Ah (lead acid battery) 51.2 V, 500 Ah (lithium battery)	48 V, 480 Ah (lead acid battery) 51.2 V, 500 Ah (lithium battery)
Hydraulic Tank Capacity	120 L (26.4 gal(UK)/31.7 gal(US))	180L(39.6 gal (UK)/47.6 gal (US))	180 L (39.6 gal (UK)/47.6 gal (US))
System Voltage	48 VDC	48 VDC	48 VDC
Weight			
Weight	9,600 kg(21,164 lbs)	11,950 kg(26, 345 lbs)	12,260 kg(27,029lbs)
Standards Compliance	GB/CE/EAC	GB/CE/ANSI/EAC	GB/CE/EAC

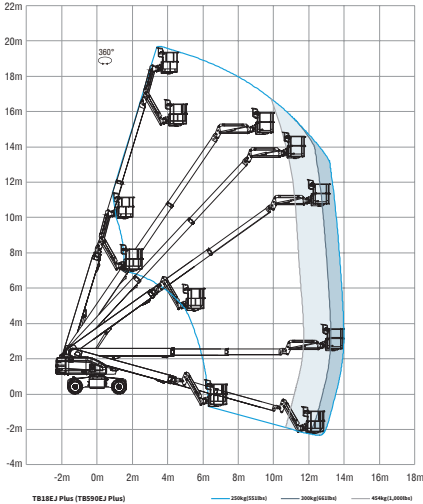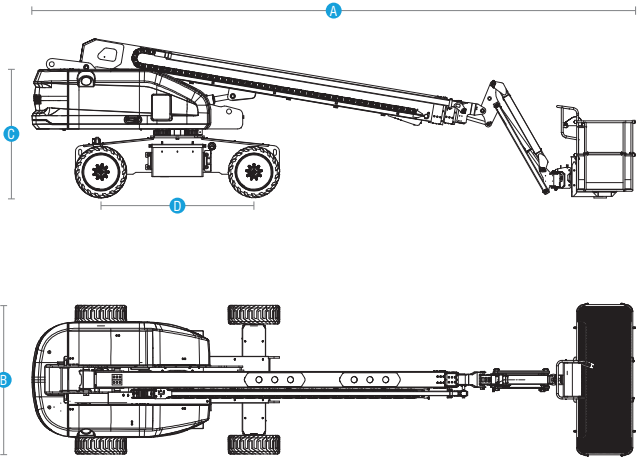

SINOBOOM ELECTRIC BOOM LIFTS + RANGE EXTENDER = HYBRID MODELS

RANGE EXTENDERS FOR ELECTRIC BOOM LIFTS

FEATURES



Highly integrated
design



High energy
conversion efficiency








Easy
transportation



Simple
Installation


PRODUCT HIGHLIGHTS

-  Easily transform an electric model into a hybrid model
-  Highly integrated modular design for easy installation and maintenance
-  A cost-effective solution to reduce TCO
-  Universal design compatible with various models
-  Worry-free charging anytime, anywhere
-  3.5 hrs fast charging to 80%
-  Up to 50-day long endurance

AVAILABLE MACHINES

TB20EJ Plus(TB600EJ Plus)
TB22EJ Plus(TB740EJ Plus)
TB26EJ Plus(TB860EJ Plus)
TB28EJ Plus(TB910EJ Plus)
TB32EJN Plus((TB1060EJN Plus)

STANDARDS

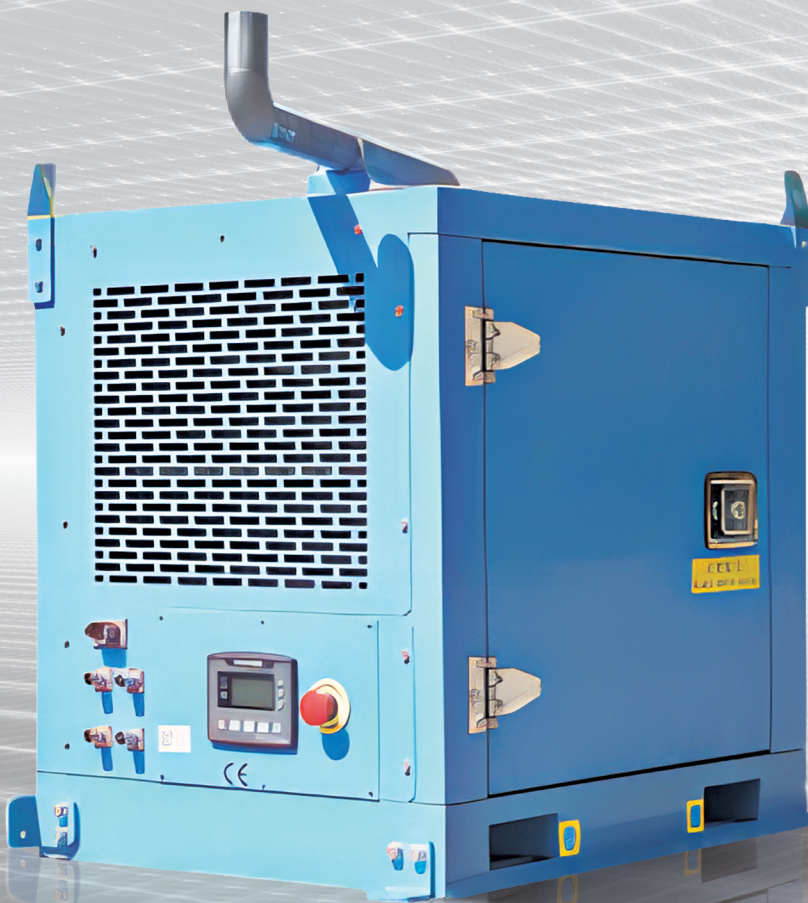

SINOBOOM[™]

PARTNERS IN ACCESS[™]

Sales@sinoboom.eu

7/2024 Copyright at Sinoboom



Scan to find out more
or visit www.sinoboom.eu